


# DIRECTOR™

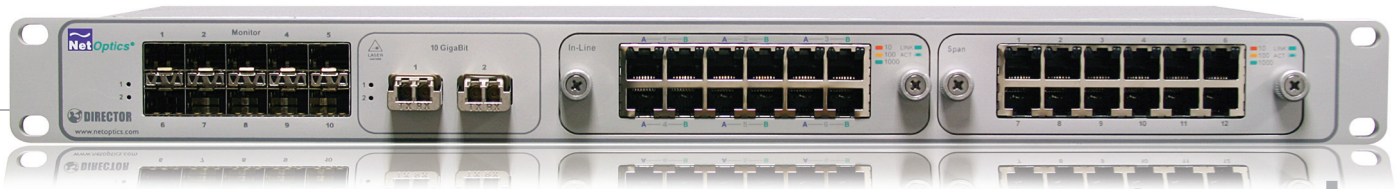

## Data Monitoring Switch

### Features

- Tap, Aggregation, Regeneration, Matrix Switching, and smart filtering in a single device
- Four 10-Gigabit XFP ports and 34 1-Gigabit ports
- In-line and SPAN network modules
- SFP monitor port interfaces
- Daisy-chain up to 10 chassis using two 10-gigabit ports (rear of chassis)
- TapFlow™ multi-layer filtering engine
- More than 1,000 filter elements per chassis
- RMON statistics (packet count, utilization, etc.)
- Indigo™ management software
- USB software upload port

### Benefits

- Leverages monitoring tool investments
- Improves network visibility and security threat management
- Relieves oversubscribed tools by filtering
- Compatible with monitoring tools and intrusion detection and prevention systems from all major manufacturers

Net Optics Director is a “Smart Filtering” appliance that directs traffic of interest to monitoring tools. Monitor as many as 26 SPAN ports or 13 in-line links with up to 11 monitoring tools.

TapFlow™ filtering technology enables you to select traffic of interest for each tool based on protocols, IP addresses, ports, and VLANs.



Director™

Director provides access capabilities you need to leverage your monitoring tools across your entire network while streamlining the amount of data the tools need to process. It is a versatile component of a monitoring access platform (MAP) for improved network visibility and security threat management across the entire network.

### Efficient Monitoring Access

Today’s networks are delivering more services and carrying greater amounts of multi-protocol traffic at higher data rates. A single set of wires now carries data, voice, and streaming video simultaneously. Increased security threats and tighter regulatory compliance requirements further complicate network operations.


Maintaining network security and performance in this environment means monitoring more points in the network, for more detailed information, and for different types of data. As a result, monitoring tools are oversubscribed and multiple groups with various responsibilities compete for use of the tools and access points.


Director answers the need for more efficient monitoring access by enabling a pool of tools to be deployed across a large number of network links, with remote, centralized control of exactly which traffic is directed to each tool.

Using browser-based or platform-based software with friendly graphical user interfaces, tools are easily and instantly moved from one link or set of links to another without unplugging and plugging cables and physically moving devices. There is no need to wait for a maintenance window or get approvals for changing the network configuration, because once Director is in place, it is completely transparent to the network. Even if power is removed from both of the unit’s redundant power supplies, the fully passive design ensures that in-line network links remain open and network traffic keeps flowing.


### Indigo™ Management Software

Net Optics provides a versatile console for managing and monitoring any number of Director and other Net Optics devices. Its easy-to-use, Windows-based graphical user interface (System Manager) makes configuring and monitoring Director simple, and password protection ensures security.

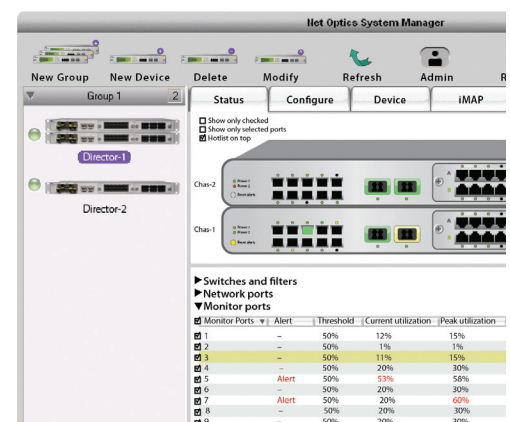


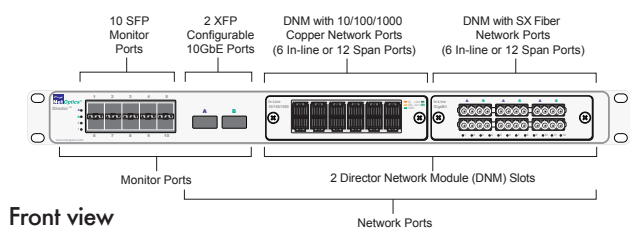

Front view

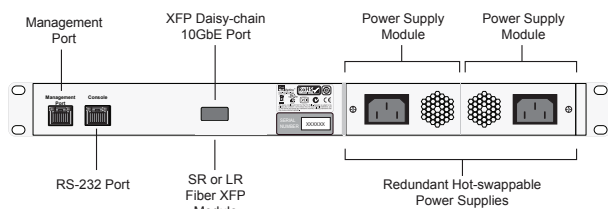

Rear view

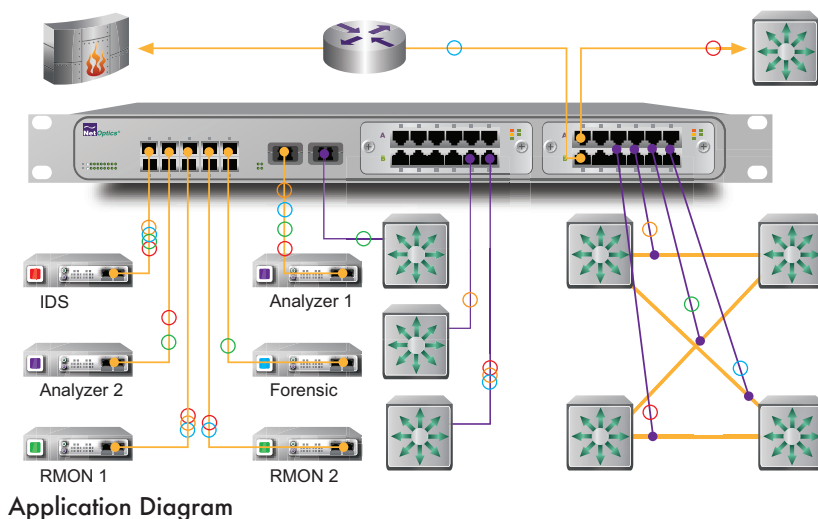

Application Diagram

## Specifications, chassis

**Operating Temperature:** 0°C to 40°C

**Storage Temperature:** -10°C to 70°C

**Relative Humidity:** 10% min, 95% max, non-condensing

**Dimensions:** 1.75" high x 25" deep x 19" wide

**Mounting:** Surface or 19" rack mount (1U)

**Weight:**

DIR-7400 (25lbs)

DIR-5400 (24lbs)

DIR-3400 (23lbs)

DNM (1.5lbs)

**Network Port Slots:** (2) Director Network Module (DNM)

**Monitor Ports:** (10) SFP

**Configurable 10Gigabit Ports:** (2) XFP

**Daisy-chain (uplink) 10Gigabit Ports:** (2) XFP

**Management Port:** (1) RJ45 10/100 Copper Network

**Configuration (CLI) Port:** (1) RS-232 DB9

**USB Port:** (1) Supports thumb drives for software upload

**Power:** (2) AC universal

**Power:** 100-240VAC, 2A, 47-63Hz (Japan: 100-125VAC, ~120 VA, 50-60Hz)

**DC Input:** -48VDC nominal, -36 to -72VDC, 6.0A

**DC Receptacle:** Terminal peak, 12-14 gauge wire

(All ports) Link LEDs (with speed indication on Copper ports),

(All ports) Activity LEDs

(1) Alarm LED

(2) Power LEDs

**Hardware throughput:** 74Gbps, 54Gbps and 34Gbps

**TapFlow:** More than 1,000 filter elements per chassis; filter by IP source address, IP destination address, MAC source address, MAC destination address, source port, destination port, protocol, network port or port group, VLAN, utilization threshold

**RMON statistics:** Current utilization, peak utilization, peak time, total packets, total bytes, CRC errors, collision packets, oversize packets, undersize packets

**Alarms:** Programmable utilization threshold alarm for each network and monitor port

Net Optics Web Manager—compatible with all major Web browsers

Net Optics System Manager—compatible with Windows XP, Windows 2000, and Windows 98

SNMP v3 support

Fully RoHS compliant

**DIR-7400:** Director Main Chassis with 10 SFP monitor ports, 2 XFP 10GbE ports, 2 XFP uplink ports  
**DIR-5400:** Director Main Chassis with 10 SFP monitor ports, 2 XFP uplink ports  
**DIR-3400:** Director Main Chassis with 10 SFP monitor ports

**DIR-7400-DC:** Director Main Chassis with 10 SFP monitor ports, 2 XFP 10GbE ports, 2 XFP uplink ports, -48V  
**DIR-5400-DC:** Director Main Chassis with 10 SFP monitor ports, 2 XFP uplink ports, -48V  
**DIR-3400-DC:** Director Main Chassis with 10 SFP monitor ports, -48V

## Specifications, DNM

### Copper Interfaces

(12) RJ45 Network Ports 10/100/1000Mbps

(6) In-line or (12) SPAN depending on model

22-24 AWG unshielded twisted pair cable, CAT5e or better recommended

### Fiber Optic Interfaces

(12) Gigabit SX Network Ports, LC type

(6) In-line or (12) SPAN depending on model

**Fiber Type:** Corning Multimode 50 or 62.5/125µm, 850 nm

**Transceiver:** Gigabit SX 850nm, VCSEL, supports 62.5/125µm

**Transceiver:** Gigabit LX 1310nm or 1550nm, VCSEL, supports 8.5/125µm

**Safety:** Class 1, eye-safe, laser emitter type; conforms to the applicable requirements per US 21 CFR (I) and EN 60825-1; also UL 1950 applications

### Part Numbers

DNM-100: DNM, CU3, Inline

DNM-101: DNM, CU3, Inline, Virtual Zero Delay

DNM-110: DNM, CU3, Span

DNM-200: DNM, Fiber, MM, Inline, 62.5µm, 850nm, 50:50

DNM-202: DNM, Fiber, MM, Inline, 62.5µm, 850nm, 70:30

DNM-210: DNM, Fiber, MM, Span, 62.5µm, 850nm

DNM-220: DNM, Fiber, MM, Inline, 50µm, 850nm, 50:50

DNM-222: DNM, Fiber, MM, Inline, 50µm, 850nm, 70:30

DNM-230: DNM, Fiber, MM, Span, 50µm, 850nm

DNM-300: DNM, Fiber, SM, Inline, 8.5µm, 1310nm, 50:50

DNM-302: DNM, Fiber, SM, Inline, 8.5µm, 1310nm, 70:30

DNM-310: DNM, Fiber, SM, Span, 8.5µm, 1310nm

DNM-320: DNM, Fiber, SM, Inline, 8.5µm, 1550nm, 50:50

DNM-330: DNM, Fiber, SM, Span, 8.5µm, 1550nm



5303 Betsy Ross Drive • Santa Clara, CA 95054  
+1 (408) 737-7777

Net Optics® is a trademark of Net Optics, Inc.  
Copyright 2011 Net Optics, Inc. All rights reserved.